




DuraFlash™

ME2 | SATA | mSATA SSD

SMART's DuraFlash ME2 mSATA SSDs incorporate the latest generation 3D NAND-technology and SMART Modular's proprietary NVMSentry™ firmware to deliver high performance SSD products with endurance up to one drive writes per day (1 DWPD) for five years. The new ME2 SSDs offer better cost per bit over previous 64-layer and 96-layer NAND generations without sacrificing performance and reliability. Further optimization of the NVMSentry firmware also yields enhancements in read and write consistency over wide ranges of application workloads.

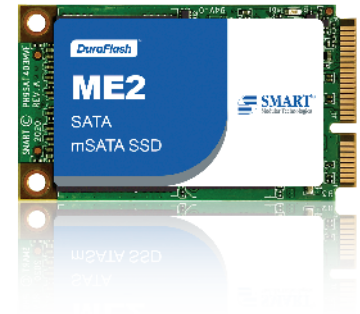

Features & Benefits

- The Latest Generation 3D NAND Technology
- Quality of Service (QoS) with 3 Nines of Latency Consistency
- 1 DWPD For Five Years
- SMART's Proprietary NVMSentry Firmware
- TCG OPAL 2.0 and AES 256 Encryption
- End-to-End Data Path Protection
- Support I-Temp (-40°C to +85°C)

Applications

- Automotive
- Embedded Computing
- Gaming
- Industrial
- Medical
- Transportation

Product Family Overview

Form Factor	Capacity	Sequential Performance
2.5" SSD	240GB to 1920GB	Up to 540MB/s Read Up to 460MB/s Write
M.2 2242 SSD	240GB to 960GB	
M.2 2280 SSD	240GB to 1920GB	
mSATA SSD	240GB to 1920GB	
Slim SATA SSD	240GB to 1920GB	

Specifications

	ME2 SATA mSATA SSD
NAND Type	eTLC
Performance	
Host Interface Rate (maximum)	SATA 3.0 6Gb/s
Capacities	240GB to 1920GB
Sequential Read (maximum)	Up to 540 MB/s
Sequential Write (maximum)	Up to 460 MB/s
Random Read (maximum)	Up to 77K IOPS
Random Write (maximum)	Up to 70K IOPS
Reliability	
MTBF	> 2,000,000 hours
Endurance (JEDEC Enterprise Workload) ¹	1920GB: 3755 TBW
	960GB: 2275 TBW
	480GB: 1015 TBW
	240GB: 510 TBW
DWPD	1
SafeDATA	-
Error Correction	LDPC
Data Security	
Encryption	AES-256, TCG OPAL 2.0
Power	
Input Voltage	VCC: 3.3 V ± 5%
Environmental	
Shock	1500 g half-sine, 0.5 msec, 1 shock along each axis, X, Y, Z in each direction
Vibration	20G rms 80-2000Hz, 1.52mm 20-80Hz, 3 axis
Operating Temperature	Commercial: 0°C to +70°C Industrial: -40°C to +85°C
Storage Temperature	-40°C to +85°C
Humidity	40°C, Operation: 90% RH, Storage: 93% RH
Physical	
Length	50.80 mm
Width	29.85 mm
Height	3.80 mm

¹Endurance is directly related to the User Specific Workload.

Ordering Information

Part Number	Density
ME2 SATA mSATA SSD Commercial Operating Temperature (0°C to +70°C)	
SRMST1920FCM2AC3	1920GB
SRMST960GFCM2AC3	960GB
SRMST480GFCM2AC3	480GB
SRMST240GFCM2AC3	240GB
ME2 SATA mSATA SSD Industrial Operating Temperature (-40°C to +85°C)	
SRMST1920FIM2AC3	1920GB
SRMST960GFIM2AC3	960GB
SRMST480GFIM2AC3	480GB
SRMST240GFIM2AC3	240GB



For more information, please visit: www.smartm.com

**Product images are for promotional purposes only. Labels may not be representative of the actual product.*

Headquarters/North America:

T: (+1) 800-956-7627 • T: (+1) 510-623-1231
F: (+1) 510-623-1434 • E: info@smartm.com

Latin America:

T: (+55) 11 4417-7200 • E: sales.br@smartm.com

Asia/Pacific:

T: (+65) 6678-7670 • E: sales.asia@smartm.com

EMEA:

T: (+44) 0 7826-064-745 • E: sales.euro@smartm.com

Customer Service:

T: (+1) 510-623-1231 • E: customers@smartm.com